



TSUN TITAN Microinverter

TSOL-MP2250 TSOL-MP3000 TSOL-MS3000

High Efficiency

Higher output power, up to 3000W

Higher input DC current, up to 18.5A, compatible with 182/210 solar module

Individual power conversion, up to 6 MPPTs, fit for complicated roof installation

Unique topology design, Max. efficiency up to 97.2%

High Safety

Low DC input voltage, no risk for DC Arc

Comply with the requirements of rapid shutdown

High Usability

Plug & Play design, fast installation and wiring

Integrated with TSUN independent developed communication module, no extra monitor device needed

"One-button" networking configuration with multiple micro inverters at the same time, unique monitoring solution for microinverter

High Reliability

IP67 design, high level of dustproof and waterproof, suitable for outdoor

Unique radiating fin design, good heat dissipation, longer life time

Standard 12 years warranty including the communication module

CE VDE 0126 VDE 4105 EN 50549 AS4777 CEI 0-21 INMETRO RD 1699 NTS631 G 98 CQC MEA PEA


TSUNESS Co., Ltd

sales@tsun-ess.com www.tsun-ess.com +86-512-66186028

Technical Data

Model	TSOL-MP2250	TSOL-MP3000	TSOL-MS3000
Input(DC)			
Quantity of Input	4 inputs, 4 Panels	6 inputs, 5~6 Panels	4 inputs, 7~8 Panels
Recommended Module Power [W]	480~700+	480~700+	380~600+
Start up Voltage per Input@Rated condition [W]	22	22	24
Mppt Voltage Range per Input [V]	18~60	18~60	22~120
Max. Input Voltage per Input [V]	60	60	120
Max. Short-circuit Current per Input(A)	20	20	16
Max. Input Current per Input [A]	18.5	18.5	15
Quantity of MPPT	4	6	4
Output [AC]			
Max. Continous Output Power [VA]	2250	3000	3000
Nominal Continous Output Power [W]	2250	3000	3000
Nominal Output Current [A]	10.2	13.6	13.6
Max Output Current [A]	11	14	14
Nominal Output Voltage [V]	220/230/240, L/N/PE		
Nominal Frequency [Hz]	50/60		
Power Factor	>0.99 default, 0.8 leading ... 0.8 lagging		
Output Current Harmonic Distortion	<3%		
Efficiency			
Peak Inverter Efficiency	97.0%	97.1%	97.2%
CEC Weighted Efficiency	96.5%	96.6%	96.7%
Nominal MPPT Efficiency	99.9%	99.9%	99.9%
Mechanical Data			
Dimensions (WxHxD) [mm]	354 * 294 * 60		
Weight [kg]	6.4	7.2	6.8
General Data		Protection	
Display	LED indicators;TSUN APP+WEB	Anti-Islanding protection	Integrated
Communication	built-in WiFi module / 4G module (Optional)	DC reverse polarity protection	Integrated
Type of Isolation	Transformerless	Insulation monitoring	Integrated
Type of Enclosure	IP67	AC surge protection	TYPE II
Cooling	Natural convection	Residual current monitoring	Integrated
Operating Ambient Temperature Range	-25 ~ +65 °C (derating of over 50°C Ambient Temperature)	AC overcurrent protection	Integrated
Night Time Power Consumption	<1W	AC short-circuit protection	Integrated
Relative Humidity	100%	AC over/under voltage protection	Integrated
Max. Operating Altitude Without Derating [m]	2000	AC over/under frequency protection	Integrated
Standards	EN/IEC 62109-1, EN/IEC 62109-2, VDE-AR-N-4105, EN 50549-1, ABNT	Over-heat protection	Integrated

Diagram

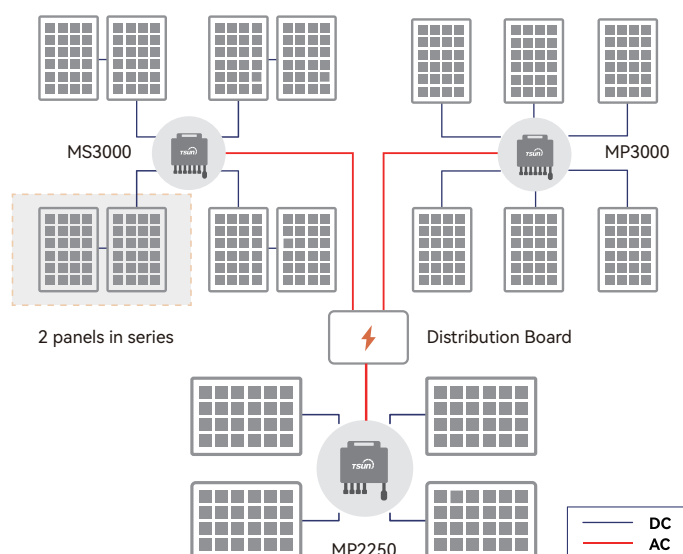

For more information , visit / contact us at www.tsun-ess.com

© 2022 TSUNESS . All rights reserved.All specifications are subject to change without prior notice